




**Minnesota Pollution
Control Agency**

520 Lafayette Road, Saint Paul, Minnesota 55155-4194

A Guide to Noise Control in Minnesota

Acoustical Properties, Measurement, Analysis, Regulation

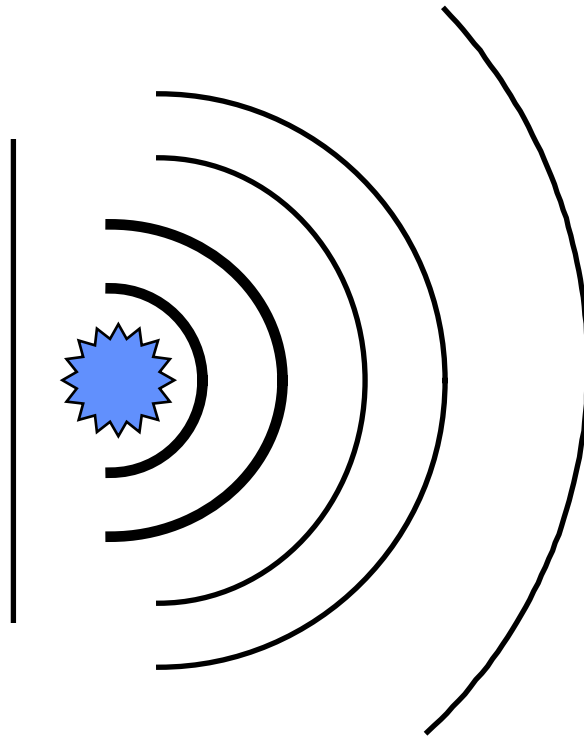

Noise Program Coordinator: Brian J. Timerson

e-mail: brian.timerson@pca.state.mn.us

phone (651) 296-7898

FAX (651) 297-8701

revised 3/99

TABLE OF CONTENTS

INTRODUCTION	3
<i>Wave Motion</i>	3
<i>Decibel Levels of Common Noise Sources</i>	5
USING DECIBELS	6
<i>Distance Attenuation Estimations</i>	6
<i>Addition and Subtraction of Decibel Levels</i>	7
<i>Background Noise Correction</i>	8
HUMAN PERCEPTION OF SOUND	9
<i>Perceived Change in Decibel Levels</i>	9
<i>Weighting Networks</i>	9
MEASUREMENT PROCEDURES	11
<i>Errors Caused by Reflecting Objects</i>	11
<i>NTP-1 Measurement Procedures</i>	12
<i>NTP-2 Test Procedure</i>	13
RULES OF THUMB	17
REGULATORY AGENCIES	18
NOISE RULES AND STATUTES	19
<i>Minnesota Noise Pollution Control Rules</i>	19
<i>Minnesota Motor Vehicle Noise Limits</i>	26
<i>Minnesota Motorboat Noise Limits</i>	29
<i>Minnesota Snowmobile Noise Limits</i>	30

Introduction

Noise is a pollutant. While its physical and emotional effects are difficult to define quantitatively, the noise level itself can be measured.

Sound. *An alteration of pressure that propagates through an elastic medium such as air which produces an auditory sensation.*

Noise. *Any undesired sound.*

Wave Motion

Sound travels in a wave motion through the air to our ears. An effective tool to demonstrate wave motion is a weight hanging from a spring. Picture the following diagram as a single weight and spring combination varying as time progresses along the horizontal axis.

Periodic Motion - Weight on a Spring

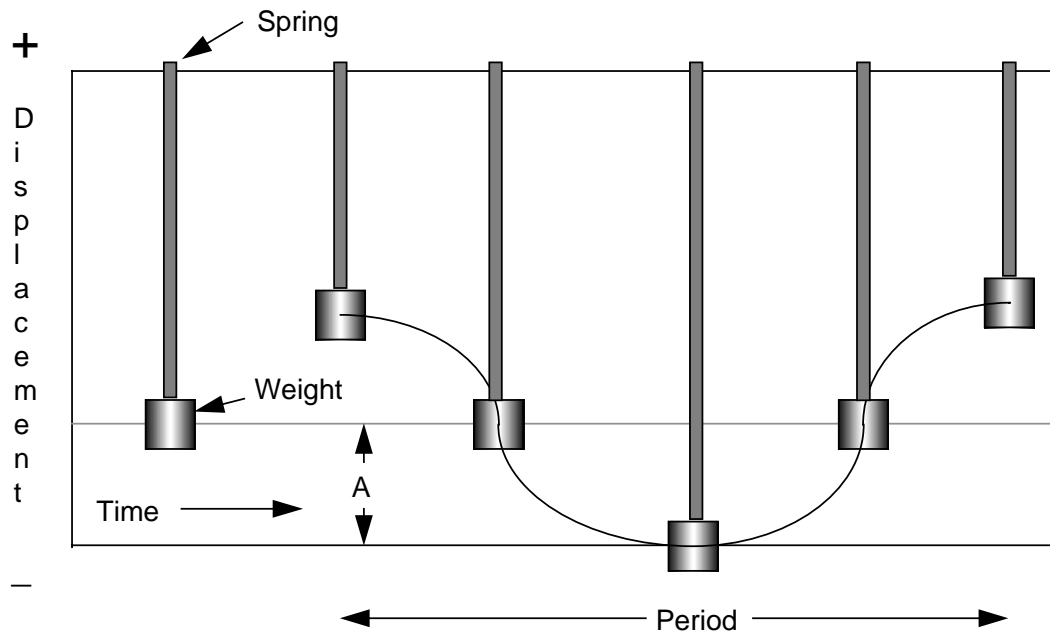


Figure 1.1

In Figure 1.1, the first position of the weight on the spring is at rest with no forces exerted upon the system. If the weight is raised above its point of rest and the progression of the weight moving down and up again is observed over a period of time, a sinusoidal wave form is

produced. This example demonstrates the relationship between a linear motion, the weight bouncing on the spring, and its corresponding wave form. The *Amplitude* of the moving weight is denoted as A on the diagram and corresponds with the maximum displacement of the weight from its “at rest” position, or the peak of the wave form in the positive or negative direction. The *Period* of the vibration is the amount of time taken to produce one complete cycle. The number of cycles per second defines the *Frequency* of the periodic motion which is denoted by the unit of *Hertz*, abbreviated as "Hz".

Comparison of Periodic Motion to Sound Waves

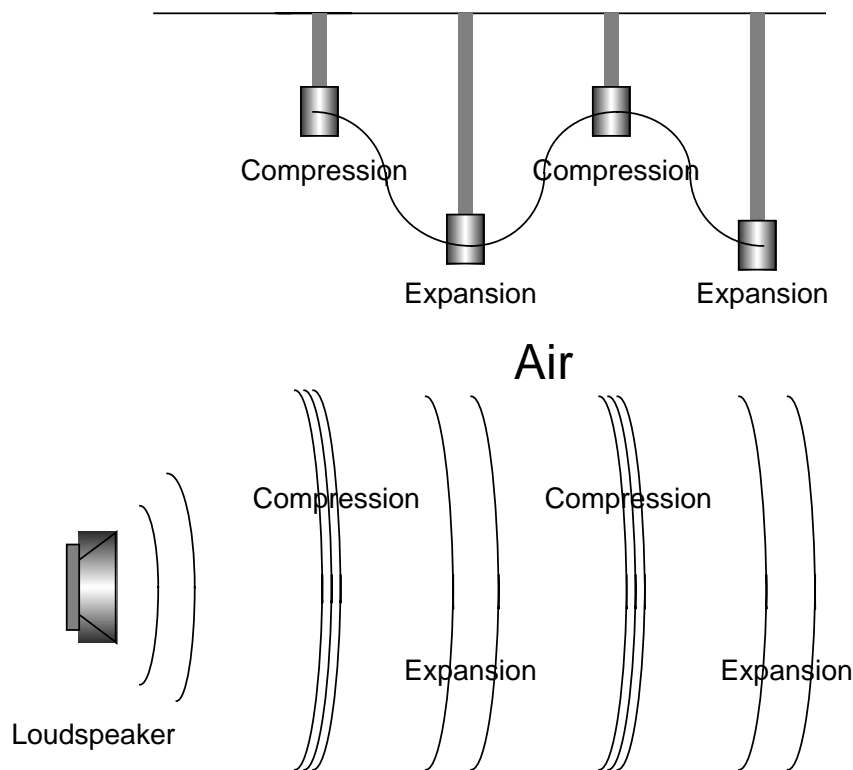


Figure 1.2

The graphical representation of sounds in Figure 1.2 are *Pure Tones*, which are sounds made up of a single frequency. A familiar example of a pure tone is the sound produced when a single key of a piano is pressed. For instance, the middle C key on a piano vibrates the associated wire at a rate of approximately 260 times per second or 260 Hertz. The vibration of the wire transfers its motion to the sound board of the piano, which then vibrates at the same frequency, causing the air adjacent to the sound board to form compression and expansion waves in the air emitting outward from the sound board. When received by the human ear, this is regarded as sound.

Most sounds are not pure tones but a mixture of tones of varying amplitude, frequency, and duration. The intensity of sound waves produce a sound pressure level, which is commonly measured in a unit called the *Decibel*. The decibel is a logarithmic measurement used to accommodate a numbering scheme that encompasses a large range of values. The logarithm is used because the human ear can detect sounds more than a million times quieter than a jet aircraft during take off.

$$\text{Sound Pressure Level} = 20 \log_{10} \left(\frac{\text{Measured Sound Pressure}}{\text{Reference Pressure (Pref)}} \right)$$

$$\text{Reference Pressure (Pref)} = 0.00002 \text{ Newton's / (meter)}^2$$

Decibel = The ratio between two quantities that are proportional to power. The commonly used unit for measuring sound pressure levels.

Decibel Levels of Common Noise Sources

Many different properties affect the noise level of a specific source type. For example, three lawn mowers may have three different noise levels because of differences in each specific piece of equipment. Noise level also depends on the distance from the noise source and the attenuation of the surrounding environment.

Figure 1.3 provides a rough estimate of decibel levels of some common noise sources.

Decibel Levels of Common Noise Sources

<u>Sound Pressure Level (dBA)</u>	<u>Noise Source</u>
140 -----	Jet Engine (at 25 meters)
130 -----	Jet Aircraft (at 100 meters)
120 -----	Rock and Roll Concert
110 -----	Pneumatic Chipper
100 -----	Jointer/Planer
90 -----	Chainsaw
80 -----	Heavy Truck Traffic
70 -----	Business Office
60 -----	Conversational Speech
50 -----	Library
40 -----	Bedroom
30 -----	Secluded Woods
20 -----	Whisper

Figure 1.3

Using Decibels

Addition and subtraction of decibels is often necessary for estimating total noise levels or background noise. Because decibels are measured using a logarithmic scale, conventional linear mathematics can not be used. The most convenient way to perform simple arithmetic functions involving logarithmic measurements is to use doubling rules. These rules provide an accurate estimate of the effect distance and multiple sources have on measured sound pressure level.

Distance Attenuation Estimations


When the distance is doubled from a **Line** source the sound level decreases three decibels.

Example: If a sound level is: **70 decibels at 50 feet it will be
67 decibels at 100 feet, and
64 decibels at 200 feet.**

When the distance is doubled from a ***Point*** source the sound level decreases six decibels.

Example: If a sound level is: 95 decibels at 50 feet it will be
89 decibels at 100 feet, and
83 decibels at 200 feet.

Distance Attenuation of Noise Levels

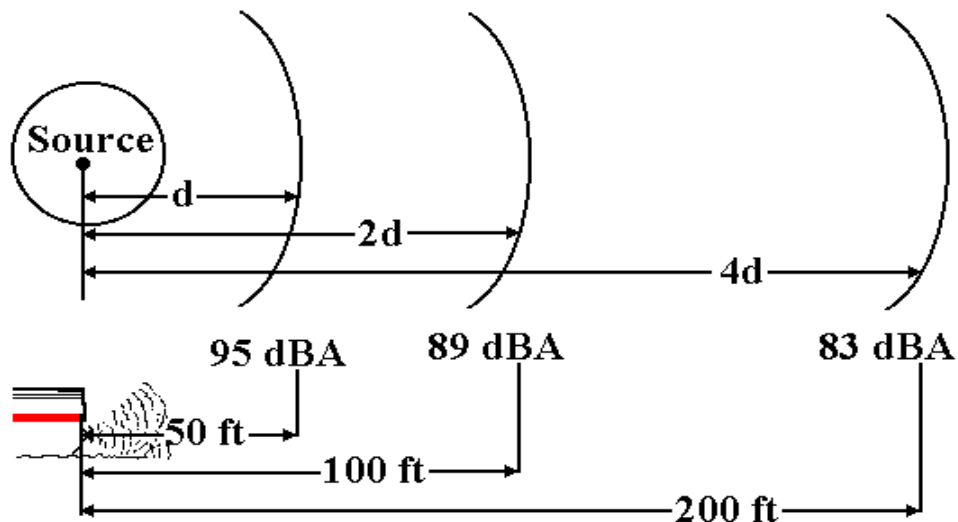

Addition and Subtraction of Decibel Levels

In many situations pertaining to noise control and monitoring, it is very useful to be able to add and subtract noise levels. A doubling of sound energy yields an increase of three decibels. It is important to note the characteristics of logarithmic addition or subtraction of decibel levels.

Addition and Subtraction of Decibel Levels

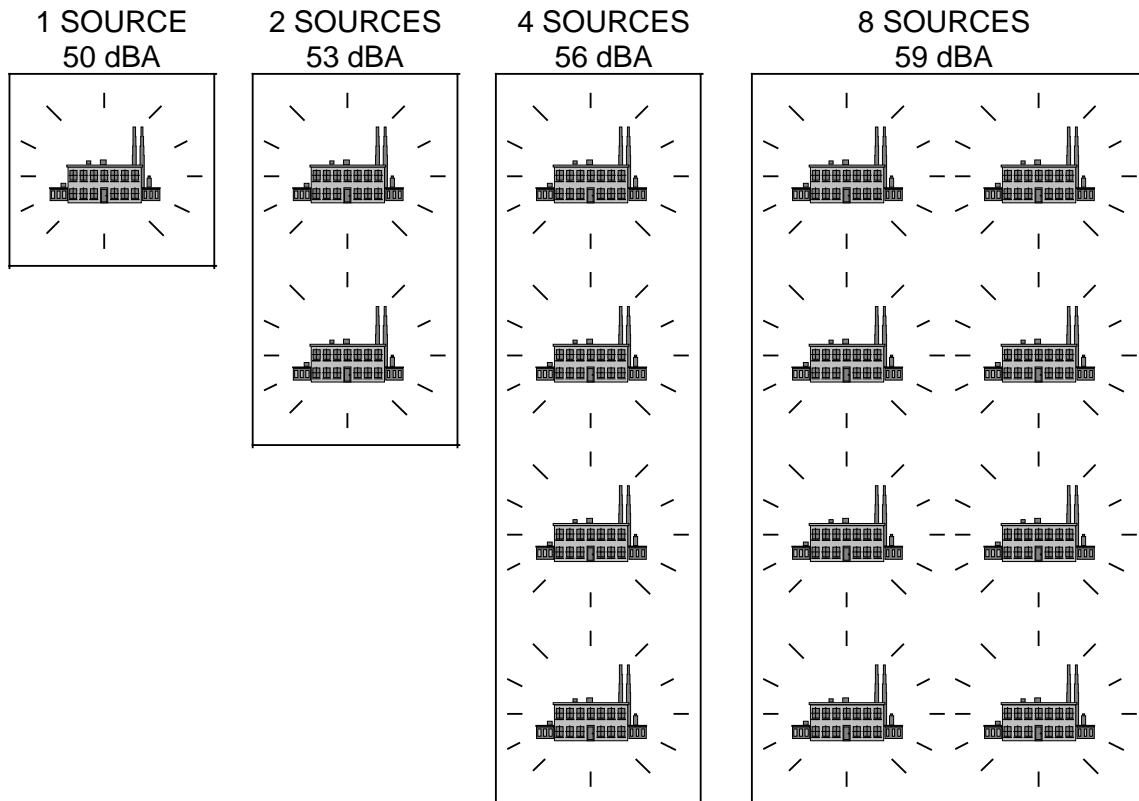


Figure 2.1

Background or ambient noise is present in any environmental noise-monitoring situation. Background noise is considered to be all noise sources other than the noise source being monitored. Wind may be a major source of ambient noise. The MPCA's noise test procedures state,

Measurements must not be in sustained winds or in precipitation which results in a difference of less than ten decibels between the background noise level and the noise source being measured.

Background Noise Correction

Figure 2.2 is a graph used to estimate the amount of background noise influencing a measurement, and the corresponding decibel level to be subtracted from the total measurement to determine the decibel level of the noise source being monitored.

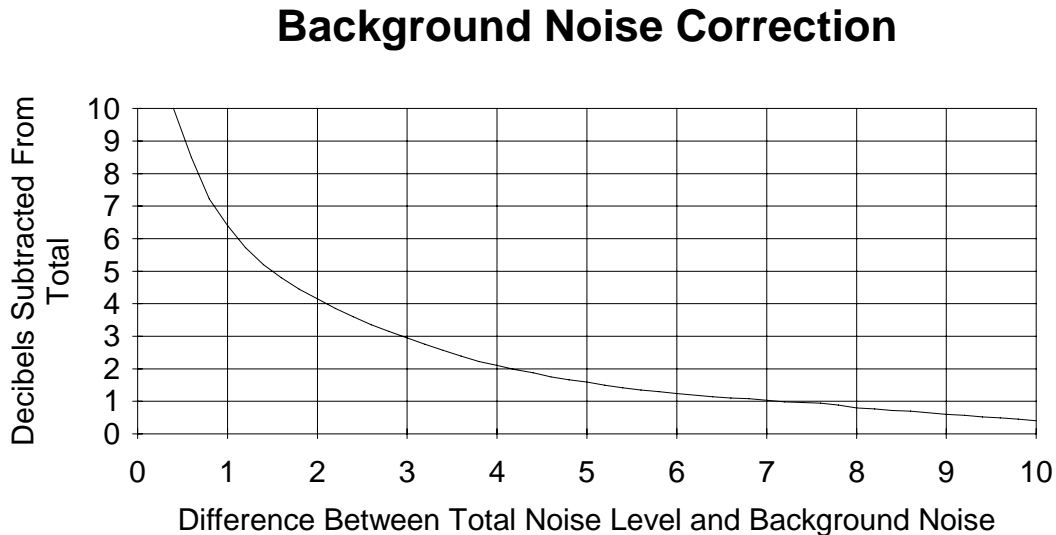


Figure 2.2

Figure 2.2 is useful in calculating the effect background noise has on the total noise level being monitored. The background noise must be more than ten decibels below the noise level of the source being monitored to have confidence in the accuracy of the measurement.

In certain instances, when a single noise source is analyzed along with other noise sources, Figure 2.2 can be used to isolate the noise source being monitored and calculate its individual noise level. This is done by measuring and recording the total noise level of all sources. Next, the noise source to be isolated is turned off and a noise level reading is taken with all the other existing noise sources in operation. Total noise level is then subtracted from the background noise level. If, for example, the total noise level is 84 dBA, then falls to 80 dBA when the isolated source is turned off, Figure 2.2 can be used to attribute an 82 dBA noise level to that source in the absence of background noise.

Human Perception of Sound

The threshold of perception of the human ear is approximately three decibels, and a five-decibel change is considered to be clearly noticeable to the ear. This is primarily due to the logarithmic measuring metric typically associated with decibels. As Figure 3.1 demonstrates, a 10-decibel change would be perceived to be twice as loud.

Perceived Change in Decibel Levels

Perceived Change in Decibel Level	
Change in Sound Level	Perceived Change to the Human Ear
± 1 dB -----	Not Perceptible
± 3 dB -----	Threshold of Perception
± 5 dB -----	Clearly Noticeable
± 10 dB -----	Twice (or Half) as Loud
± 20 dB -----	Fourfold (4x) Change

Figure 3.1

Weighting Networks

Weighting networks are used in noise monitors to attenuate specific frequencies in the audio spectrum to attempt to duplicate the response of the human ear. The graph in Figure 3.2 represents the compensation of a C-weighting network, A-weighting network and the sensitivity of the ear. This illustration is useful in understanding how the ear is inefficient in the detection of lower frequencies and is very sensitive to higher frequencies.

The C-weighting network is a linear network that does not noticeably vary in its amount of compensation throughout the audio spectrum. For this reason the C-weighting network represents the actual sound pressure level that is received by the sound level meter. C-weighting is used during the calibration of sound level meters to insure that the sound level displayed on the meter is invariant of the frequency of the calibrator.

The human ear can not detect or "hear" lower frequencies as well as higher frequencies. The A-weighting network is used to duplicate the sensitivity of the human ear. At 100 Hertz, the A-weighting network filters out approximately 20 dB from the incoming signal before it is combined with the levels from the other frequency ranges to produce an A-weighted sound level. On the A-weighting scale, at 1000 Hertz, nothing is subtracted.

Weighting Networks

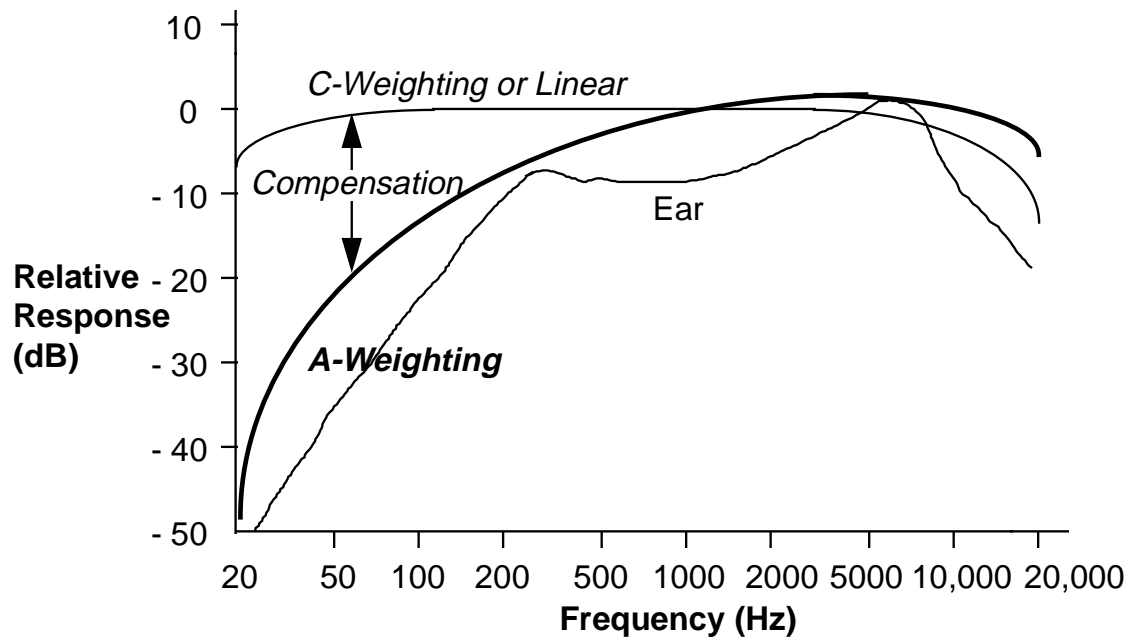


Figure 3.2

Measurement Procedures

When noise measurements are performed, an important part of site selection is the consideration of errors caused by reflecting objects. Figure 4.1 shows the effect on noise measurements of a reflective object such as a wall.

Errors Caused by Reflecting Objects

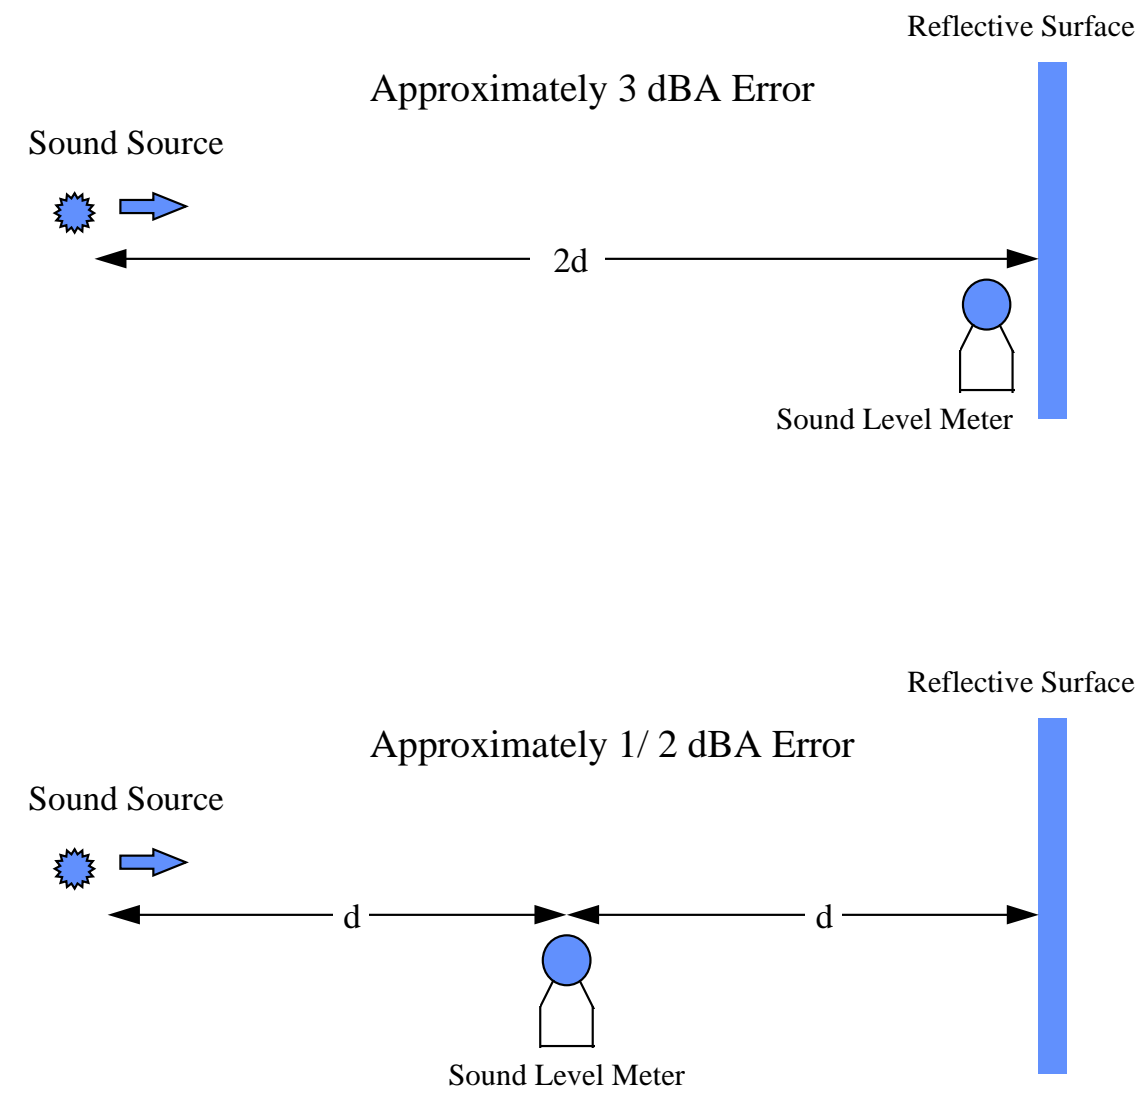


Figure 4.1

NTP-1 Measurement Procedures

NTP-1 MEASUREMENT PROCEDURE FOR NON-IMPULSIVE NOISE

The following test procedure has been approved by the Executive Director of the Minnesota Pollution Control Agency for the measurement of non-impulsive noise.

A. INSTRUMENTATION:

- a sound level meter and a microphone conforming to type 0, 1, 2, or S specifications under ANSI S1.4-1983;
- a calibrator of known frequency and level;
- a small screwdriver for sensitivity adjustment;
- microphone windscreen;
- noise survey form;
- tripod (optional)

B. METEOROLOGY:

- Measurements must not be made in sustained winds or in precipitation which results in a difference of less than 10 decibels between the background noise level and the noise source being measured;
- Temperature and/or humidity conditions must be within the equipment manufacturer's specifications.

C. LOCATION:

- Measurements must be made at or within the applicable NAC at the point of human activity nearest the noise source;
- Measurements must be made outdoors;
- Measurements must be made at least three feet off the ground and away from natural or manmade structures which would prevent an accurate measurement (barriers, houses).

D. SURVEY PROCEDURE:

- Monitoring must be conducted for at least a one hour time period;
- Calibration must be performed before and after the monitoring period. Adjustments made if necessary;
- Sound measuring devices must use the "A" weighting and FAST response characteristics;
- Background noise must be at least 10 decibels lower than the noise source being measured;
- A survey form must be completed containing date, time, location, noise source, wind speed/direction, temperature, humidity, equipment information (make, model, serial #), site sketch with the location of the noise source and measurement location (including appropriate distances), data and calibration information. A sample survey form is on the following pages.

NTP-2 Test Procedure

NTP-2 TEST PROCEDURE MANUAL METHOD FOR THE MEASUREMENT OF NON-IMPULSIVE NOISE


The following test procedure has been approved by the Executive Director of the Minnesota Pollution Control Agency for the measurement of non-impulsive noise.

(A - D Identical to NTP-1 Test Procedures)

E. MANUAL MONITORING PROCEDURE:


- Using a hand-held sound level meter, take an instantaneous sound reading every 10 seconds and record on a "sample sheet." An example of a "sample sheet" is on the next page.
- Continue taking sound readings for one hour, which will give you 360 individual readings.
- To determine the L10, take the 36th loudest (10% of 360 = 36) individual sound reading by counting from the loudest to the quietest on the "sample sheet." In the example on the next page, the L10 = 63 and is the 36th **X** from the top of the sheet.
- To determine the L50, take the 180th loudest (50% of 360 = 180) individual sound reading. In the example, the L50 = 57 and represents the 180th **X** from the top of the sheet.

SAMPLE

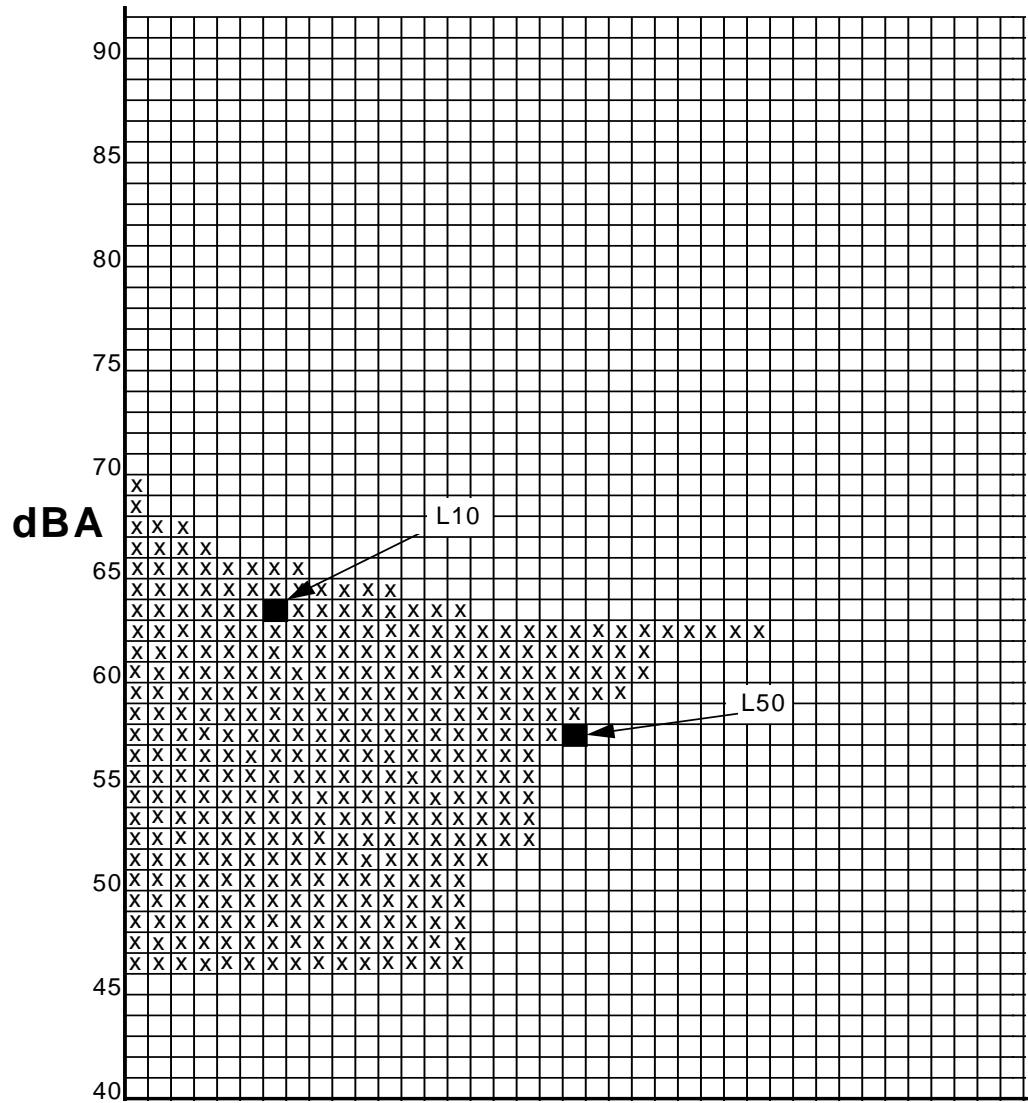

Date _____ Location _____

Manual Monitoring Data Sheet

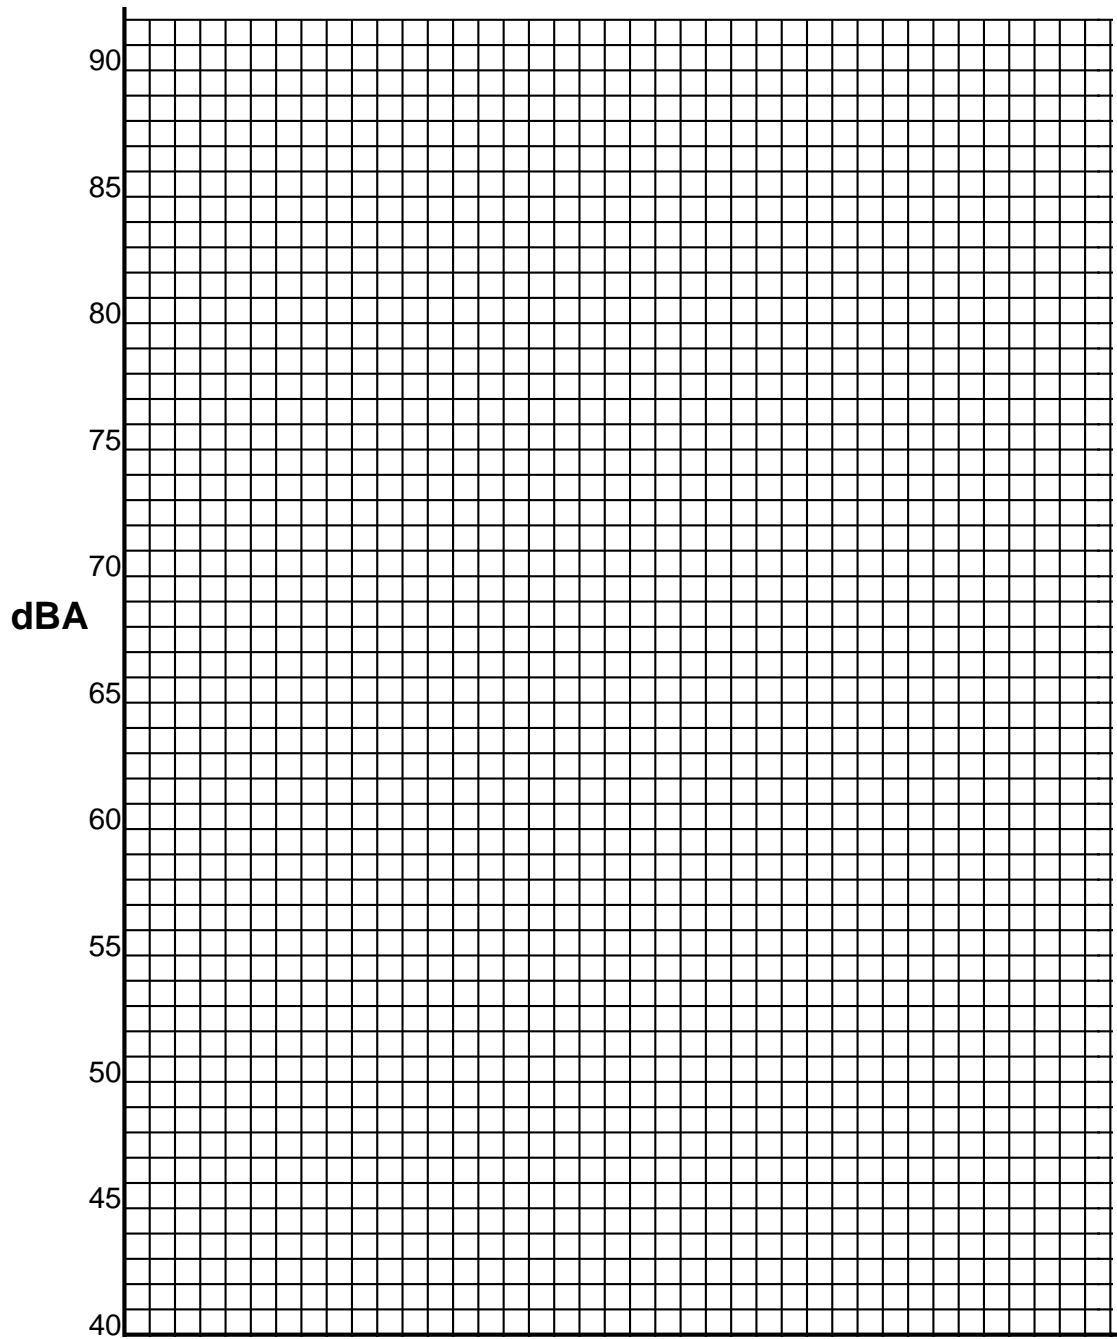

Date _____

Location _____

NOISE SURVEY

MPCA INVESTIGATOR: _____ DATE: __/__/__
INSTRUMENTATION: _____ TIME START: _____.
S/N _____ TIME END: _____.
SOURCE: _____.
MONITOR LOCATION: _____.

DIAGRAM

(INDICATE - NOISE SOURCE, NOISE RECEIVER, MICROPHONE LOCATION, REFLECTING OBJECTS/OBSTRUCTIONS AND DISTANCES.)

Meteorological Conditions

Wind Speed / Direction

____mph/____.

TEMPERATURE: ____.

CALIBRATION

CALIBRATOR SERIAL NUMBER: ____ CALIBRATION FREQUENCY: ____Hz
INITIAL: ____dBA FINAL: ____dBA

RESULTS: L10 ____dBA L50 ____dBA

RULES OF THUMB

- **WHEN A SOUND INCREASES BY 10 DECIBELS, THE SUBJECTIVE RESPONSE IS A DOUBLING OF LOUDNESS**

Example: 60 decibels to 70 decibels = twice as loud

PERCEIVED CHANGE IN LOUDNESS

- + 1 dB - UNNOTICEABLE**
- + 3 dB - BARELY PERCEPTIBLE**
- + 5 dB - QUITE NOTICEABLE**
- +10 dB - SOUNDS TWICE AS LOUD**
- +20 dB - SOUNDS FOUR TIMES AS LOUD**

- **WHEN THE DISTANCE IS DOUBLED FROM A “POINT” SOURCE, THE SOUND LEVEL DECREASES BY SIX DECIBELS**

Example:

50 feet = 60 decibels

100 feet = 54 decibels

200 feet = 48 decibels

- **WHEN THE DISTANCE IS DOUBLED FROM A “LINE” SOURCE THE SOUND LEVEL DECREASES BY THREE DECIBELS**

Example:

50 feet = 70 decibels

100 feet = 67 decibels

200 feet = 64 decibels

- **A DOUBLING OF ENERGY YIELDS AN INCREASE OF THREE DECIBELS**

Example: 85 decibels + 85 decibels = 88 decibels

- **THE NOISE SOURCE BEING MEASURED SHOULD BE AT LEAST 10 DECIBELS ABOVE THE BACKGROUND NOISE LEVEL**
- **KEEP AT LEAST AS FAR AWAY FROM ANY LARGE REFLECTING OBJECT (EG., A WALL) AS FROM THE SOURCE BEING MEASURED**
- **ALL MEASUREMENTS SHOULD BE MADE WITH THE MICROPHONE AT LEAST THREE FEET ABOVE THE GROUND**

Regulatory Agencies

Several agencies have noise regulations for different noise sources. Noise regulations are either source standards or receiver-based standards.

Department of Natural Resources (DNR) - The Minnesota DNR has source standards for snowmobiles, motorboats, personal watercraft and off-highway vehicles.

Federal Aviation Administration (FAA) - The FAA has source regulations for commercial jet engines. All commercial jet engines must meet noise emission criteria prior to being certified for flight.

Federal Highway Administration (FHWA) - The FHWA does not have actual noise standards, but has guidelines of an L10 of 70 dBA which are used to trip a federal funding mechanism for noise abatement on highway projects.

Federal Railroad Administration (FRA) - Regulation of railroad related noise is the responsibility of the FRA.

Housing and Urban Development (HUD) - HUD has noise regulations that establish acceptable noise zones HUD housing projects must fall into.

Occupational Safety and Health Administration (OSHA) - OSHA has regulations to protect against hearing loss in the workplace. These are “dose standards” that restrict the amount of noise an employee receives over a period of time, such as eight hours.

Local Agency - A local governing agency, such as a city, may or may not have an ordinance regulating noise levels.

Minnesota Pollution Control Agency (MPCA) - The MPCA has a receiver-based standard intended to limit noise levels and protect the health and welfare of the general public.

Noise Rules and Statutes

Minnesota Noise Pollution Control Rules

MINNESOTA RULES CHAPTER 7030
MINNESOTA POLLUTION CONTROL AGENCY
AIR QUALITY DIVISION
NOISE POLLUTION CONTROL

GENERALLY

7030.0010 INCORPORATION BY REFERENCE.

For the purpose of chapter 7030, American National Standards Institute, Specification for Sound Level Meters, S1.4-1983 is incorporated by reference. This publication is available from the American National Standards Institute, 1430 Broadway, New York, N.Y. 10018 and can be found at: the offices of the Minnesota Pollution Control Agency, 1935 West County Road B-2, Roseville, Minnesota 55113; the Government Documents Section, Room 409, Wilson Library, University of Minnesota, 309 19th Avenue South, Minneapolis, Minnesota 55454; and the State of Minnesota Law Library, 25 Constitution Avenue, Saint Paul, Minnesota 55155. This document is not subject to frequent change.

The Federal Highway Administration publication, Sound Procedures for Measuring Highway Noise: Final Report, FHWA-DP-45-1R (August 1981) is incorporated by reference. This publication is available from the United States Department of Transportation, Federal Highway Administration, 1000 North Globe Road, Arlington, Virginia 22201 and can be found at: the offices of the Minnesota Pollution Control Agency, 1935 West County Road B-2, Roseville, Minnesota 55113; the Government Documents Section, Room 409, Wilson Library, University of Minnesota, 309 19th Avenue South, Minneapolis, Minnesota 55454; and the State of Minnesota Law Library, 25 Constitution Avenue, Saint Paul, Minnesota 55155. This document is not subject to frequent change.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 18 SR 614

7030.0020 DEFINITIONS.

Subpart 1. Application. The terms used in chapter 7030 have the meanings given them in this part.

Subp. 2. A-weighted. "A-weighted" means a specific weighting of the sound pressure level for the purpose of determining the human response to sound. The specific weighting characteristics and tolerances are those given in American National Standards Institute S1.4-1983, section 5.1.

Subp. 3. Daytime. "Daytime" means those hours from 7:00 a.m. to 10:00 p.m.

Subp. 4. dB(A). "dB(A)" means a unit of sound level expressed in decibels (dB) and A-weighted.

Subp. 5. Decibel. "Decibel" means a unit of sound pressure level, abbreviated as dB.

Subp. 6. Impulsive noise. "Impulsive noise" means either a single sound pressure peak (with either a rise time less than 200 milliseconds or total duration less than 200 milliseconds) or multiple sound pressure peaks (with either rise times less than 200 milliseconds or total duration less than 200 milliseconds) spaced at least by 200 millisecond pauses.

Subp. 7. L10. "L10" means the sound level, expressed in dB(A), which is exceeded ten percent of the time for a one hour survey, as measured by test procedures approved by the commissioner.

Subp. 8. L50. "L50" means the sound level, expressed in dB(A), which is exceeded 50 percent of the time for a one hour survey, as measured by test procedures approved by the commissioner.

Subp. 9. Municipality. "Municipality" means a county; a city; a town; a regional planning and development commission established under Minnesota Statutes, chapter 473; the metropolitan council; or other governmental subdivision of the state responsible by law for controlling or restricting land use within its jurisdiction.

Subp. 10. Nighttime. "Nighttime" means those hours from 10:00 p.m. to 7:00 a.m.

Subp. 11. Person. "Person" means any human being, any municipality or other governmental or political subdivision or other public department or agency, any public or private corporation, any partnership, firm, association, or other organization, any receiver, trustee, assignee, agency, legal entity, other than a court of law, or any legal representative of any of the foregoing, but does not include the agency.

Subp. 12. Sound pressure level. "Sound pressure level", in decibels, means 20 times the logarithm to the base 10 of the ratio of the pressure to the reference pressure. The reference pressure shall be 20 micronewtons per square meter.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; L 1987 c 186 s 15; 18 SR 614

7030.0030 NOISE CONTROL REQUIREMENT.

No person may violate the standards established in part 7030.0040, unless exempted by Minnesota Statutes, section 116.07, subdivision 2a. Any municipality having authority to regulate land use shall take all reasonable measures within its jurisdiction to prevent the establishment of land use activities listed in noise area classification (NAC) 1, 2, or 3 in any location where the standards established in part 7030.0040 will be violated immediately upon establishment of the land use.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 18 SR 614

7030.0040 NOISE STANDARDS.

Subpart 1. Scope. These standards describe the limiting levels of sound established on the basis of present knowledge for the preservation of public health and welfare. These standards are consistent with speech, sleep, annoyance, and hearing conservation requirements for receivers within areas grouped according to land activities by the noise area classification (NAC) system established in part 7030.0050. However, these standards do not, by themselves, identify the limiting levels of impulsive noise needed for the preservation of public health and welfare. Noise standards in subpart 2 apply to all sources.

Subp. 2. Noise standards.

Noise Area Classification	Daytime		Nighttime	
	<u>L50</u>	<u>L10</u>	<u>L50</u>	<u>L10</u>
1	60	65	50	55

2	65	70	65	70
3	75	80	75	80

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 18 SR 614

7030.0050 NOISE AREA CLASSIFICATION.

Subpart 1. Applicability. The noise area classification is based on the land use activity at the location of the receiver and determines the noise standards applicable to that land use activity unless an exception is applied under subpart 3.

Subp. 2. Noise area classifications. The noise area classifications and the activities included in each classification are listed below:

Noise Area Classification

Land Use Activities

1

Household Units (includes farm houses)
Group quarters
Residential hotels
Mobile home parks or courts
Transient lodging
Other residential
Motion picture production
Medical and other health services
Correctional institutions
Educational services
Religious activities
Cultural activities and nature exhibitions
Entertainment assembly
Camping and picnicking areas (designated)
Resorts and group camps
Other cultural, entertainment, and recreational activities.

Noise Area Classification

Land Use Activities

2

Railroad terminals (passenger)
Railroad terminals (passenger and freight)
Rapid rail transit and street railway passenger terminals
Bus passenger terminals (inter city)
Bus passenger terminals (local)
Bus passenger terminals (inter city and local)
Other motor vehicle transportation
Airport and flying field terminals (passenger)
Airport and flying field terminals (passenger and freight)
Marine terminals (passenger)
Marine terminals (passenger and freight)
Automobile parking
Telegraph message centers
Transportation services and arrangements
Wholesale trade
Retail trade -- building materials, hardware, and farm equipment
Retail trade -- general merchandise

Retail trade -- food
 Retail trade -- automotive, marine craft, aircraft, and accessories
 Retail trade -- apparel and accessories
 Retail trade -- furniture, home furnishings, and equipment
 Retail trade -- eating and drinking
 Other retail trade
 Finance, insurance, and real estate services
 Personal services
 Business services
 Repair services
 Legal services
 Other professional services
 Contract construction services
 Governmental services (except correctional institutions)
 Miscellaneous services (except religious activities)
 Public assembly (except entertainment assembly and race tracks)
 Amusements (except fairgrounds and amusement parks)
 Recreational activities (except designated camping and picnicking areas)
 Parks.

Noise Area Classification

3

Land Use Activities

Food and kindred products -- manufacturing
 Textile mill products -- manufacturing
 Apparel and other finished products made from fabrics, leather, and similar materials -- manufacturing
 Lumber and wood products (except furniture) -- manufacturing
 Furniture and fixtures -- manufacturing
 Paper and allied products -- manufacturing
 Printing, publishing, and allied industries
 Chemicals and allied products -- manufacturing
 Petroleum refining and related industries
 Rubber and miscellaneous plastic products -- manufacturing
 Stone, clay, and glass products -- manufacturing
 Primary metal industries
 Fabricated metal products -- manufacturing
 Professional, scientific, and controlling instruments; photographic and optical goods; watches and clocks -- manufacturing
 Miscellaneous manufacturing (except motion picture production)
 Railroad, rapid transit, and street railway transportation (except passenger terminals)
 Motor vehicle transportation (except passenger terminals)
 Aircraft transportation (except passenger terminals)
 Marine craft transportation (except passenger and freight terminals)
 Highway and street right-of-way

Communication (except telegraph message centers)
 Utilities
 Other transportation, communication, and utilities (except transportation services and arrangements)
 Race tracks
 Retail trade -- eating and drinking
 Fairgrounds and amusement parks
 Agricultural
 Agricultural and related activities
 Forestry activities and related services (including commercial forest land, timber production, and other related activities)
 Fishing activities and related services
 All other activities not otherwise listed.

Noise Area Classification

4

Land Use Activities

Undeveloped and unused land area (excluding non-commercial forest development)
 Non commercial forest development
 Water areas
 Vacant floor area
 Under construction
 Other undeveloped land and water areas.

Subp. 3. Exceptions. The noise area classification for a land use may be changed in the following ways if the applicable conditions are met.

A. The daytime standards for noise area classification 1 shall be applied to noise area classification 1 during the nighttime if the land use activity does not include overnight lodging.

B. The standards for a building in a noise area classification 2 shall be applied to a building in a noise area classification 1 if the following conditions are met:

(1) the building is constructed in such a way that the exterior to interior sound level attenuation is at least 30 dB(A);

(2) the building has year-round climate control; and

(3) the building has no areas or accommodations that are intended for outdoor activities.

C. The standards for a building in a noise area classification 3 shall be applied to a building in a noise area classification 1 if the following conditions are met:

(1) the building is constructed in such a way that the exterior to interior sound level attenuation is at least 40 dB(A);

(2) the building has year-round climate control; and

(3) the building has no areas or accommodations that are intended for outdoor activities.

D. The standards for a building in a noise area classification 3 shall be applied to a building in a noise area classification 2 if the following conditions are met:

(1) the building is constructed in such a way that the exterior to interior sound level attenuation is at least 30 dB(A);

(2) the building has year-round climate control; and

(3) the building has no areas or accommodations that are intended for outdoor activities.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 18 SR 614

7030.0060 MEASUREMENT METHODOLOGY.

Subpart 1. Measurement location. Measurement of sound must be made at or within the applicable NAC at the point of human activity which is nearest to the noise source. All measurements shall be made outdoors.

Subp. 2. Equipment specifications. All sound level measuring devices must meet Type O, I, II, or S specifications under American National Standards Institute S1.4-1983.

Subp. 3. Calibration. All sound level measuring devices must, at a minimum, be externally field calibrated before and after monitoring using a calibration device of known frequency and sound pressure level.

Subp. 4. Measurement procedures. The following procedures must be used to obtain representative sound level measurements:

A. Measurements must be made at least three feet off the ground or surface and away from natural or artificial structures which would prevent an accurate measurement.

B. Measurements must be made using the A-weighting and fast response characteristics of the sound measuring device as specified in American National Standards Institute S1.4-1983.

C. Measurements must not be made in sustained winds or in precipitation which results in a difference of less than ten decibels between the background noise level and the noise source being measured.

D. Measurements must be made using a microphone which is protected from ambient conditions which would prevent an accurate measurement.

Subp. 5. Data documentation. A summary sheet for all sound level measurements shall be completed and signed by the person making the measurements. At a minimum, the summary sheet shall include:

- A. date;
- B. time;
- C. location;
- D. noise source;
- E. wind speed and direction;
- F. temperature;
- G. humidity;
- H. make, model, and serial number of measuring equipment;
- I. field calibration results;
- J. monitored levels; and
- K. site sketch indicating noise source, measurement location, directions, distances, and obstructions.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 17 SR 1279; 18 SR 614

7030.0070 SOUND ATTENUATION MEASUREMENT METHODOLOGY.

Subpart 1. Purpose. Sound level measurements made for assessing sound attenuation as specified in part 7030.0050, subpart 3, item B, C, or D, shall be made according to the requirements of this part.

Subp. 2. Equipment. The equipment shall meet the requirements specified in part 7030.0060, subpart 2.

Subp. 3. Calibration. The equipment must meet the calibration requirements specified in part 7030.0060, subpart 3.

Subp. 4. Measurement procedure. The measurement procedure described in

FHWA-DP-45-1R, section 8 must be used for determination of the sound attenuation.

Subp. 5. Equivalent methods. Methods equivalent to those described in subpart 4 may be used provided they are approved by the commissioner of the Minnesota Pollution Control Agency. The commissioner shall approve an alternative method if the commissioner finds that the method will produce representative data and results which are as reliable as the methods specified in subpart 4.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; L 1987 c 186 s 15; 18 SR 614

7030.0080 VARIANCE.

If, upon written application of the responsible person, the agency finds that by reason of exceptional circumstances strict conformity with any provisions of any noise rule would cause undue hardship, would be unreasonable, impractical, or not feasible under the circumstances, the agency may permit a variance upon the conditions and within the time limitations as it may prescribe for the prevention, control, or abatement of noise pollution in harmony with the intent of the state and any applicable federal laws.

Statutory Authority: MS s 116.07 subds 2,4

History: 11 SR 43; 18 SR 614

Minnesota Motor Vehicle Noise Limits

MINNESOTA RULES CHAPTER 7030
MINNESOTA POLLUTION CONTROL AGENCY
AIR QUALITY DIVISION
NOISE POLLUTION CONTROL
MOTOR VEHICLE NOISE LIMITS

7030.1000 DEFINITION.

"Motor vehicle" means any self-propelled vehicle not operated exclusively upon railroad tracks and any vehicle propelled or drawn by a self-propelled vehicle and includes vehicles known as trackless trolleys which are propelled by electric power obtained from overhead trolley wires but not operated upon rails, except snowmobiles.

Statutory Authority: MS s 116.07 subd 4
History: 18 SR 614

7030.1010 PROHIBITIONS.

Subpart 1. Operation of vehicle. No person shall operate either a motor vehicle or combination of vehicles of a type subject to registration pursuant to Minnesota Statutes, chapter 168 at any time or under any condition of grade, load, acceleration, or deceleration in such a manner as to exceed the noise limits contained herein for the category of motor vehicle and speed limits specified, when tested with a measurement procedure approved by the commissioner.

Subp. 2. Sale of vehicle. No person shall sell or offer for sale a new motor vehicle or combination of vehicles of a type subject to registration pursuant to Minnesota Statutes, chapter 168 which when maintained according to the manufacturer's specifications would exceed the noise limits contained herein for the category of motor vehicle and speed limits specified, when tested with a measurement procedure approved by the commissioner.

Subp. 3. Modification of vehicle. No person shall modify a motor vehicle or combination of vehicles of a type subject to registration pursuant to Minnesota Statutes, chapter 168 in a manner which will amplify or increase the noise emitted by the vehicle, above the noise limits contained herein for the category of motor vehicle and speed limits specified, when tested with a measurement procedure approved by the commissioner. No person shall operate a motor vehicle so modified.

Subp. 4. Sale of parts. No person shall sell or offer for sale replacement or additional parts for a motor vehicle or combination of vehicles of a type subject to registration pursuant to Minnesota Statutes, chapter 168 which when installed in the vehicle will amplify or increase the noise emitted by the vehicle, above the noise limits contained herein for the category of motor vehicle and speed limits specified, when tested with a measurement procedure approved by the commissioner. No person shall operate a motor vehicle incorporating such parts.

Statutory Authority: MS s 116.07 subd 4
History: L 1987 c 186 s 15; 18 SR 614

7030.1020 SCOPE.

This chapter applies to the total noise from a vehicle or combination of vehicles of a type subject to registration pursuant to Minnesota Statutes, chapter 168 and shall not be construed as limiting or precluding the enforcement of any other provision of law relating to motor vehicle exhaust noise.

Statutory Authority: MS s 116.07 subd 4

History: 18 SR 614

7030.1030 EXCEPTIONS.

Vehicles under parts 7030.1050 and 7030.1060 are allowed to exceed the noise limits contained herein when performing acceleration maneuvers for safety purposes.


Statutory Authority: MS s 116.07 subd 4

History: 18 SR 614

7030.1040 NOISE LIMIT FOR VEHICLES OVER 10,000 POUNDS.

Motor vehicle noise limits for vehicles with a manufacturer's gross vehicle weight rating of more than 10,000 pounds and any combination of vehicles towed by such motor vehicle.

7030.1040 NOISE LIMIT FOR VEHICLES OVER 10,000 POUNDS.

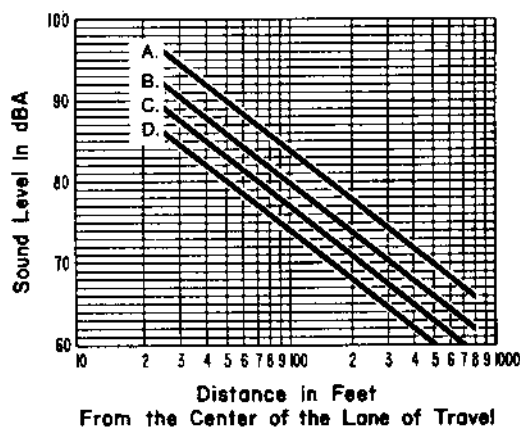

A. Speed limits greater than 35 mph.

B. Speed limits equal to or less than 35 mph and stationary run-up tests (for vehicles with governed engines). For stationary run-up tests on all-paved surfaces, add 2 dBA.


C. Speed limits equal to or less than 35 mph and stationary run-up tests (for vehicles with governed engines), for vehicles manufactured on or after January 1, 1978. For stationary run-up tests on all-paved surfaces, add 2 dBA.

D. Speed limits equal to or less than 35 mph and stationary run-up tests (for vehicles with governed engines), for vehicles manufactured on or after January 1, 1982. For stationary run-up tests on all-paved surfaces, add 2 dBA.

Statutory Authority: MS s 116.07 subd 4

History: 18 SR 614

7030.1050 MOTOR VEHICLE NOISE LIMITS FOR MOTORCYCLES. 7030.1050

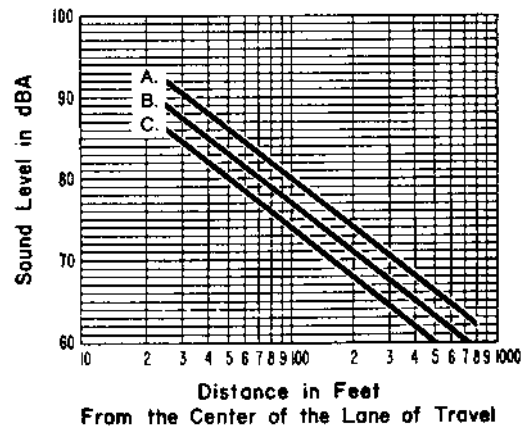


- A. For vehicles manufactured before January 1, 1975.
- B. Speed limits greater than 35 mph for vehicles manufactured on or after January 1, 1975.
- C. Speed limits equal to or less than 35 mph for vehicles manufactured on or after January 1, 1975.

Statutory Authority: MS s 116.07 subd 4
History: 18 SR 614

7030.1060 NOISE LIMITS FOR OTHER VEHICLES.

Motor vehicle noise limits for any other motor vehicle not included under parts 7030.1040 and 7030.1050 and any combination of vehicles towed by such motor vehicle.

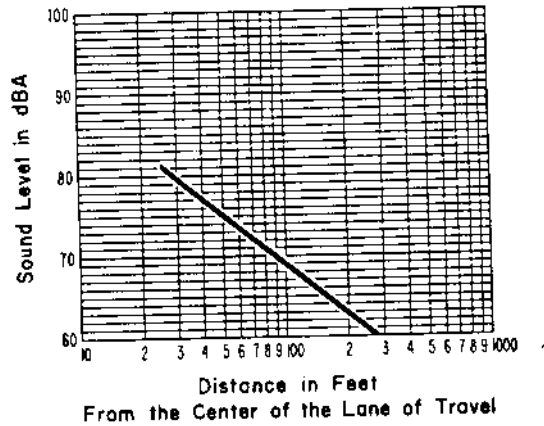

Statutory Authority: MS s 116.07 subd 4
History: 18 SR 614

Minnesota Motorboat Noise Limits

MINNESOTA STATUTES CHAPTER 86B MINNESOTA DEPARTMENT OF NATURAL RESOURCES BOAT AND WATER SAFETY RULES MOTORBOAT NOISE LIMITS

86B.321 NOISE LIMITS.

Subdivision 1. Operation in excess of noise limits prohibited. A person may not operate a motorboat under any condition of load, acceleration, or deceleration in a manner that exceeds the noise limits contained in subdivision 2.

Subd. 2. Noise Limits. (a) The noise limits for the total noise from the marine engine or motorboat may not exceed:

(1) for marine engines or motorboats manufactured before January 1, 1982, a noise level of 84 decibels on the A scale measured at a distance of 50 feet from the motorboat or equivalent noise levels at other distances as specified by the commissioner; and

(2) for marine engines or motorboats manufactured on or after January 1, 1982, a noise level of 82 decibels on the A scale measured at a distance of 50 feet from the motorboat or equivalent noise levels at other distances as specified by the commissioner.

(b) The noise limits in paragraph (a) do not preclude enforcement of other laws relating to motorboat noise.

Subd. 3. Applicability. The provisions of this section do not apply to motorboats operating under a permit issued under section 86B.121 or a United States coast guard marine event permit in a regatta or race while on trial runs or while on official trials for speed records during the time and in the designated area authorized by the permit.

86B.521 MOTORBOAT NOISE CONTROL.

Subdivision 1. Exhaust muffling system required. A motor may not be used on a motorboat unless it is equipped with an efficient muffler, underwater exhaust, or other device that adequately muffles or suppresses the sound of the exhaust of the motor so as to prevent excessive or unusual noise. A motor may not be equipped with a cut-out.

Subd. 2. Sale of motor that exceeds noise limits prohibited. A person may not sell or offer for sale a new marine engine or motorboat that would exceed the noise limits contained in section 86B.321, subdivision 2, under a test procedure approved by the commissioner if the motor is maintained according to the manufacturer's specifications.

Subd. 3. Modification of engine to exceed noise limits prohibited. (a) A person may not modify a marine engine or motorboat in a manner that will amplify or increase the noise emitted by the marine engine or motorboat above the noise limits contained in section 86B.321, subdivision 2, under a test procedure approved by the commissioner.

(b) A person may not operate a motorboat with an engine modified to increase noise above the noise limits.

Subd. 4. Sale of parts that cause excessive noise. (a) A person may not sell or offer for sale replacement or additional parts for a marine engine or motorboat which when installed in the marine engine or motorboat will amplify or increase the noise emitted by the marine engine or motorboat above the noise limits contained in section 86B.321, subdivision 2, under a test procedure approved by the commissioner.

(b) A person may not operate a motorboat incorporating parts prohibited to be sold under paragraph (a).

Subd. 5. Applicability. The provisions of this section do not apply to motorboats operating under a permit issued under section 86B.121 or a United States Coast Guard marine event permit in a regatta, or race, while on trial runs, or while on official trials for speed records during the time and in the designated area authorized by the permit.

Minnesota Snowmobile Noise Limits

MINNESOTA STATUTES CHAPTER 84.871 MINNESOTA DEPARTMENT OF NATURAL RESOURCES MINNESOTA SNOWMOBILE NOISE RULES AND REGULATIONS SNOWMOBILE NOISE LIMITS

84.871 MUFFLERS.

Except as provided in this section, every snowmobile shall be equipped at all times with a muffler in good working order which blends the exhaust noise into the overall snowmobile noise and is in constant operation to prevent excessive or unusual noise. The exhaust system shall not emit or produce a sharp popping or crackling sound. This section does not apply to organized races or similar competitive events held on (1) private lands, with the permission of the owner, lessee, or custodian of the land; (2) public lands and water under the jurisdiction of the commissioner of natural resources, with the commissioner's permission; or (3) other public lands, with the consent of the public agency owning the land. No person shall have for sale, sell, or offer for sale on any new snow-mobile any muffler that fails to comply with the specifications required by the rules of the commissioner after the effective date of the rules.

HIST:1969 c 695 s 9; 1969 c 1129 art 10 s 2; 1985 c 248 s 70

MINNESOTA RULES 6100.5700 MINNESOTA DEPARTMENT OF NATURAL RESOURCES MINNESOTA SNOWMOBILE NOISE RULES AND REGULATIONS SNOWMOBILE NOISE LIMITS

6100.5700 REQUIRED EQUIPMENT.

Subpart 5. Mufflers. Mufflers:

A. No person shall operate a snowmobile unless it is equipped with a muffler as required by law and these rules, except that snowmobiles may be operated in organized events as authorized by Minnesota Statutes, section 84.871, without such a muffler.

B. No snowmobile manufactured on or after June 30, 1970, and before February 1, 1972, for sale in Minnesota, except snowmobiles designed for competition purposes only, shall be sold, or offered for sale, unless it is equipped with a muffler that limits engine noise to not more than 86 decibels on the A scale at 50 feet.

C. No snowmobile manufactured on or after February 1, 1972, for sale in Minnesota - except snowmobiles designed for competition purposes only, shall be sold, or offered for sale, unless it is equipped with a muffler that limits engine noise to not more than 82 decibels on the A scale at 50 feet.

D. No snowmobile manufactured on or after April 1, 1975, except a snowmobile designed for competition purposes only, shall be sold, offered for sale, or operated in Minnesota unless it is so equipped and has been certified by the manufacturer to conform to a sound level limitation of not more than 78 decibels on the A scale at 50 feet as originally equipped.

E. In certifying that a new snowmobile complies with the noise limitation requirements of this rule, a manufacturer shall make such a certification based on measurements made in accordance with the SAE

Recommended Practice J192(a), as set forth in the Report of the Vehicle Sound Level Committee, as approved by the Society of Automotive Engineers September 1970 and revised November 1973.

F. No snowmobile shall be sold or offered for sale in Minnesota unless its maker has previously furnished the commissioner with a certificate of compliance certifying that all snowmobiles made by that maker meet or exceed the applicable noise level restrictions established by these rules. The certification of compliance shall be in the form of a "Snowmobile Safety Certification Committee" label conspicuously attached to the machine showing certification by the Snowmobile Safety and Certification Committee, Inc., or a label showing compliance with Snowmobile Safety Certification Committee standards accompanied by a letter containing test results of an evaluation of noise levels by a competent independent testing laboratory. Snowmobiles intended for competition purposes only shall be exempt from this part provided a separate placard identifying that such snowmobile is not so equipped is conspicuously and permanently affixed thereto.

G. Except for organized events as authorized by Minnesota Statutes, section 84.871, no snowmobile shall be modified by any person in any manner that shall amplify or otherwise increase total noise level above that emitted by the snowmobile as originally equipped, regardless of the date of manufacture.

MS s 84.868 SR 1859